


		pH 1	pH 2	pH 3	pH 5	pH 6
	Spare Sensor Pt. No.	32011001	32011002	32011003	3201115	3201116
	Sensor Bundle Pt. No.	32011005	32011006	32011007	3201117	3201118
Applications	Potable Water	x	✓	x	✓	✓
	Waste Water	x	x	✓	✓	x
	Pool / Spa	✓	x	x	x	x
	Process	x	✓	✓	✓	✓
	Boiler Feedwater	x	x	x	x	✓
Mounting Options	Single Open Flow Cell	✓	✓	✓	✓	✓
	Dual Open Flow Cell	✓	✓	✓	✓	✓
	Triple Open Flow Cell	✓	✓	✓	✓	✓
	Closed Flow Cell	x	✓	✓	✓	✓
	Autoflush (Flow Cell)	x	✓	✓	✓	✓
	Autoclean Immersion (Dip)	x	x	✓	x	x
	Autoclean Insertion (In Pipe)	x	x	✓	x	x
	At Line Tee	x	✓	✓	✓	✓
	Handrail	x	x	✓	✓	✓
	Welding Stub	x	✓	✓	✓	✓
Specifications	Connector	BNC Connector	Built-in cable	Built-in cable	Built-in cable	Built-in cable
	Standard Cable Length	1m	6m	6m	6m	6m
	Submersible*	x	x	✓	✓	✓
	Inbuilt Temperature	x	✓	✓	✓	✓
	Max. Temperature	80°C	80°C	80°C	100°C	100°C
	Automatic Temp. Compensation	x	✓	✓	✓	✓
	Conductivity	>100 µS/cm	>100 µS/cm	>100 µS/cm	>100 µS/cm	<300 µS/cm
	Junction	Single	Single	Double	Double	Double
	Life Expectancy (Application Dependent)	12-18 months	12-18 months	12-18 months	3 years	18 months
	Back / Front Thread	¾" NPT (Back only)	¾" NPT (Front and back)	¾" NPT (Front and back)	¾" NPT (Front and back)	¾" NPT (Front and back)

*It is recommended that the probe be submerged on the end of a pole with the cable protected by running inside the pole.


Mounting Options



Single closed or open flow cell
PN: 32100001

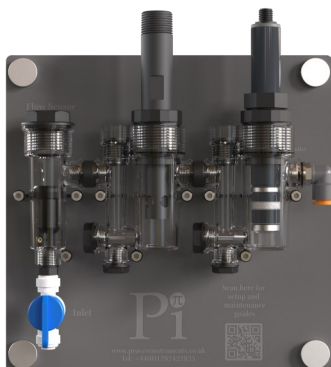

Double closed or open flow cell
PN: 32100003

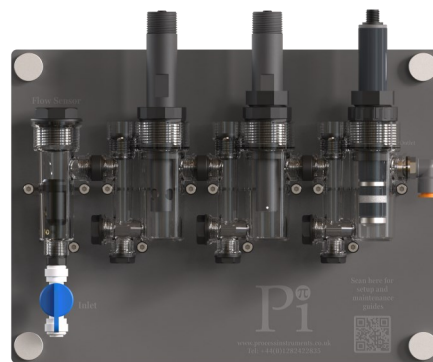

Triple closed or open flow cell
PN: 32100006



At Line Tee (Screw In)
PN: 32100102



At Line Tee (Quick Connect)
PN: 32100103




Welding Stub (screw in)
PN: 32100106

Autoclean Options



Autoclean Insertion
PN: 36000031

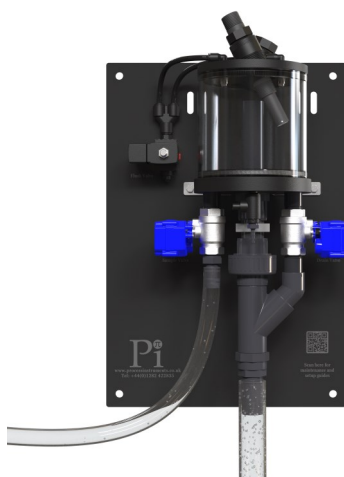

Autoflush Cell
PN: 36500001



Autoclean Immersion
PN: 36000030